

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The 1/2" Apollo® Model DC4S Top Entry Double Check Valve is designed to prevent contamination of the potable water supply due to back-siphonage or back-pressure from substances that are objectionable, but non-health hazards. This device consists of two independently-acting, spring-loaded poppet type check valves in an integral body.



FEATURES

- Low pressure loss
- Corrosion resistant
- Replaceable check modules
- Easy to install, repair and maintain
- Apollo® ball valves w/ SS handles & nuts standard
- MADE IN THE USA

MATERIAL SPECIFICATIONS

Part Name	Material
Body & Cover	Cast Bronze C84400
Check Modules	Acetal w/ Stainless Steel Springs
Spacer	Stainless Steel

DIMENSIONS (in.) – WEIGHTS (lbs.)

Body Size	1/2"
A (w/o Ball Valves)	5 5/8
B	9 3/4
C	4 1/2
D	3 1/2
E	1
F	3 5/8
Weight w/o Ball Valves	2.7
Weight w/ Ball Valves	4.4

ORDERING INFORMATION

4 S – 1 0 3 – A X

BALL VALVES

BALL VALVES


- 1 – Less ball valves
- 2 – With Apollo® ball valves
- 4 – With union-end Apollo® ball valves
- LL – Locking Lever Handles on Apollo® ball valves

APPROVALS


ASSE® 1015, USC's FCCC&HR and AWWA C-510

PERFORMANCE RATING

Maximum Working Pressure 175 psi
Hydrostatic Test Pressure 350 psi
Temperature Range 33 °F – 180 °F

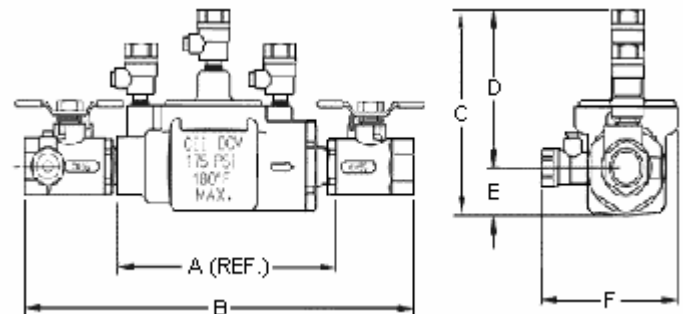

FLOW CURVES

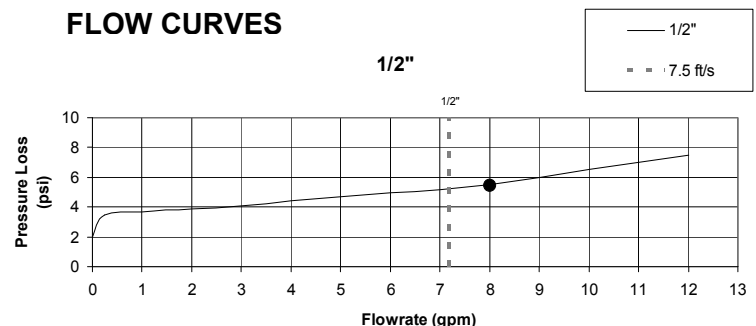

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA; www.apollovalves.com; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.