


THREADED BALL VALVE INSTALLATION



CORRECT

Two wrenches must be used when making up pipe joints to these valves.

Apply one wrench on the valve hex closest to the pipe joint being tightened and the other wrench to the pipe to prevent transmitting torque through the valve body joint.

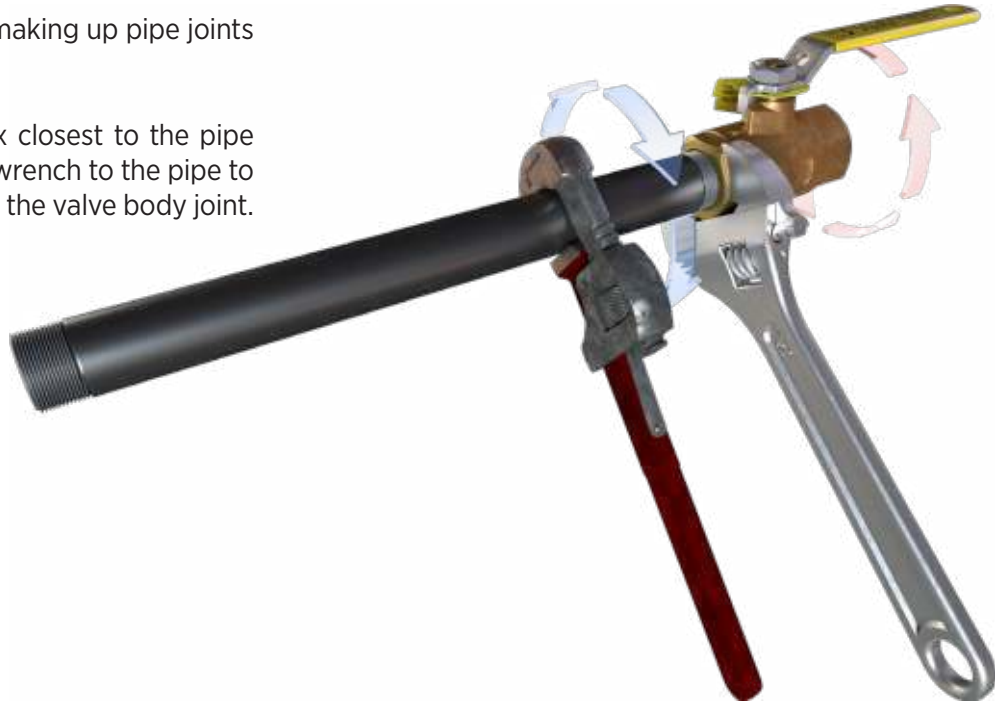

INCORRECT

One wrench is not applied to the valve hex closest to the pipe joint being tightened and will transmit torque through the valve body joint.

Improper wrenching can lead to damage to the retainer seal resulting in leakage.

For detailed instructions refer to the applicable Installation, Operation and Maintenance Instructions (IOM) on apollovalves.com.

