




Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

FEATURES:

- The streamline design provides lower pressure drop
- Easy installation with two mechanical couplings
- Easy removal and reinstallation of the screen by removing the two bolts and nuts of the coupling and end-cap (three bolts and nuts for 14”).
- Good for horizontal or vertical installations.
- Easy access to the screen from above or side-ways
- More space-saving than the Y type strainers

The Shurjoint Model 728 grooved-end T-strainers are used to remove foreign matter from pipe lines and provide inexpensive protections to pumps, meters, valves, etc. The Model 728 strainers are designed for applications where easy maintenance and large capacity of straining are needed including drinking water, cooling water, irrigation, sea water, etc. The strainer installs with two Shurjoint couplings, and is rated up to 750 psi (52 Bar) depending upon the installed coupling’s pressure rating and size. The strainer is made of 316 stainless steel mesh fringed with a durable stainless steel frame. The standard screen is mesh 12 for 2-1/2” to 3” sizes and mesh 6 for 4” to 14”.

The strainer shall be cleaned periodically or before the differential pressure reaches 10 psi

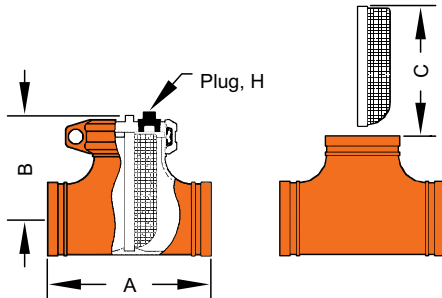

DIMENSIONS

NOMINAL SIZE	PIPE O.D.	MAX. WORKING PRESSURE (CWP)*	DIMENSIONS			H (DRAIN PLUG)	WEIGHT
			A	B	C		
in	in	PSI	in	in	in	in	lb
mm	mm	Bar	mm	mm	mm	mm	kg
2	2.375	750	6.54	4.72	4.92	½	6.6
50	60.3	52	166	120	125	15	3.0
2-1/2	2.875	750	7.50	5.19	5.59	½	8.8
65	73.0	52	191	132	142	15	4.0
3	3.500	750	8.50	5.74	6.45	½	13.2
80	88.9	52	216	146	164	15	6.0
4	4.500	750	10.00	6.49	7.48	1	17.7
100	114.3	52	254	165	190	25	8.0
5**	5.563	750	11.00	7.48	8.58	1	28.6
125	141.3	52	279	190	218	25	13.0
6	6.625	700	13.00	8.34	10.23	1	44.0
150	168.3	48	330	212	260	25	20.0
8	8.625	600	15.50	9.96	12.60	1-1/2	77.0
200	219.1	42	394	253	320	40	35.0
10	10.750	500	18.00	11.18	14.96	1-1/2	114.6
250	273.0	35	457	284	380	40	52.0
12	12.750	400	20.00	12.16	16.92	1-1/2	160.3
300	323.9	28	508	309	430	40	72.7
14	14.000	250	22.00	17.75	21.25	1-1/2	186.3
350	355.6	17	559	451	540	40	84.5

*Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
Working pressure is maximum based on Shurjoint Model Z07 access coupling and will be governed by couplings used for installation and related system components. Maximum differential pressure from inlet to outlet must not exceed 10 psi (0.69 Bar).
Working pressure is dependent upon the Shurjoint coupling used to join Model 728 to the piping system.

FLOW DATA

Values for flow of water at +60°F (+16°C).

$$Cv = \frac{Q}{\sqrt{\Delta P}}$$

Where:

Cv = Flow coefficient

Q = Flow (GPM)

ΔP = Pressure drop (psi)

Cv VALUES

NOMINAL SIZE	CV VALUES	NOMINAL SIZE	CV VALUES
in		5	
mm		125	685
2	190	6	950
50		150	
2-1/2	230	8	2108
65		200	
3	290	10	2683
80		250	
4	425	12	3872
100		300	
		14	5050
		350	

MATERIAL SPECIFICATIONS

BODY, END-CAP & COUPLING SEGMENTS:

- Ductile Iron ASTM A536, Gr. 65-45-12 and or to ASTM A395, Gr. 65-45-15, min. tensile strength: 65,000 psi (448 MPa)

SURFACE FINISH:

- Standard painted finishes in orange or RAL3000 red.
- Epoxy coatings in RAL3000 red or other colors (optional)

BOLTS & NUTS:

- Heat treated carbon manganese steel track bolts to ASTM A449-83a (or A183 Gr. 2), minimum tensile strength 110,000 psi (758 MPa), Zinc electroplated, with heavy-duty hexagonal nuts to ASTM A563.

SCREEN:

- 316 stainless steel
- 304 stainless steel (option)
- Mesh 12 (0.020" wire) for 2-1/2" to 3"
- Mesh 6 (0.041" wire) for 4" to 14"

GENERAL NOTES

- Maximum Working Pressure (CWP) listed is the maximum cold water pressure for general piping services tested to ASTM F1476 and or AWWA C606 methods. Figures listed are based on roll- or cut-grooved standard wall carbon steel pipe. For other pipe schedules or pipe materials, contact Shurjoint for additional information.
- Max. End Load is calculated based on the maximum working pressure (CWP).
- Field Joint Test: For one time only the system may be tested hydrostatically at 1.5 times the maximum working pressure listed (AWWA C606 5.2.3).
- Warning: Piping systems must always be depressurized and drained before attempting disassembly and or removal of any components.
- The 10 Year Limited Warranty applies to manufacturing defects only and does not cover severe service/temperature applications or wear parts.
- Shurjoint reserves the right to change specifications, designs and or standard without notice and without incurring any obligations.

RUBBER GASKET:

Grade "E" EPDM (Color code: Green stripe)

- Good for cold & hot water up to +230°F (+110°C). Also good for services for water with acid, water with chlorine, deionized water, seawater and waste water, dilute acids, oil-free air and many chemicals.
- **Not recommended for petroleum oils, minerals oils, solvents and aromatic hydrocarbons.**
- Maximum Temperature Range: -30°F (-34°C) to +230°F (+110°C).
*EPDM gaskets for water services are not recommended for steam service.